

# Xp8000 Customer Pole Display

POSX



www.pos-x.com



POINT OF SALE PERFECTED

Sleek and space-efficient, the Xp8000 pole display delivers quality and flexibility with a small foot print base, nine standard display emulations, vibrant VF display and adjustable viewing angles. Optimal functionality and economy make the Xp8000 a top choice for point of sale systems requiring a customer pole display.

- ◆ Ideal vertical display for smaller counter spaces
- ◆ 9 Standard display emulations
- ◆ 2-line, 20-character per line display
- ◆ Adjustable pitch angles

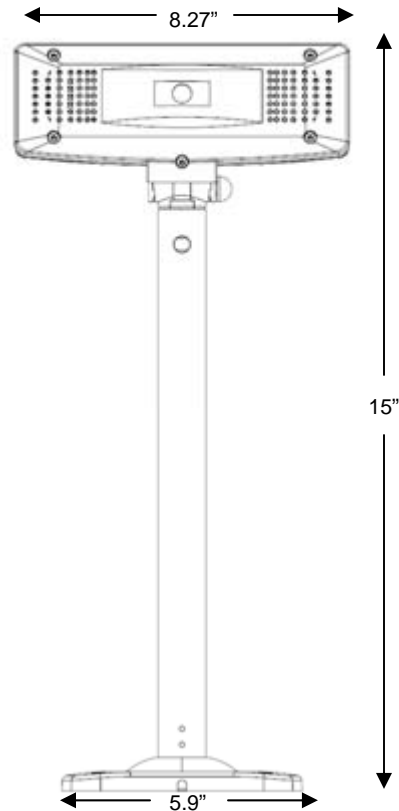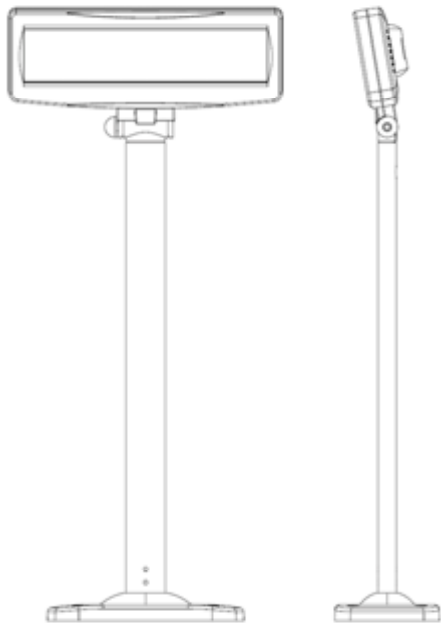

## Models

Xp8000B	Black Pole Display with Serial Interface
Xp8000I	Ivory Pole Display with Serial Interface

## PHYSICAL

Dimension (panel)	3.89" x 8.27" x 1.38" (H x L x D)	
Total Height	15"	
Dimension (base)	.42" x 3.15" OD	
Viewing Angle	Max 45°	
Pitch Angle	Max 30°	
Weight	1.76 LBS	
Cable Length	6 Feet	

## OPERATION

Interface	RS-232 db9 female	
Power Source	120vAC Input	12vDC 500mA Output
Power Consumption	15 watts max	3 watts average
CPU Speed	11.0592 MHz	

## WARRANTY

Parts	1 Year
-------	--------

## DISPLAY

Type	Vacuum Florescent Display
Display Pattern	5 x 7 dot matrix
Brightness	.700 cd/m <sup>2</sup>
Character Type	95 Alphanumeric & 32 International
Character Size	.25" x .36" (W x H)
Character Number	20 x 2
Emulations	EPSON, UTC Standard, VFD-450 UTC Enhanced, AEDEX, ICD 2002, CD 5220, DSP-800, ADA 787/788

## ENVIRONMENT

Operating Temperature	32° F to 104° F
Storage Temperature	14° F to 122° F
Relative Humidity	0% to 90% RH